

Part I: Introduction

Chapter goal:

- r get context, overview, "feel" of networking
- r more depth, detail *later* in course
- r approach:
 - m descriptive
 - m use Internet as example


Overview:

- r what's the Internet
- r what's a protocol?
- r network edge
- r network core
- r access net, physical media
- r performance: loss, delay
- r protocol layers, service models
- r backbones, NAPs, ISPs
- r history
- r ATM network

1: Introduction 1

What's the Internet: "nuts and bolts" view


- r millions of connected computing devices: *hosts, end-systems*
 - m pc's workstations, servers
 - m PDA's phones, toasters
- r running *network apps*
- r *communication links*
 - m fiber, copper, radio, satellite
- r *routers*: forward packets (chunks) of data thru network

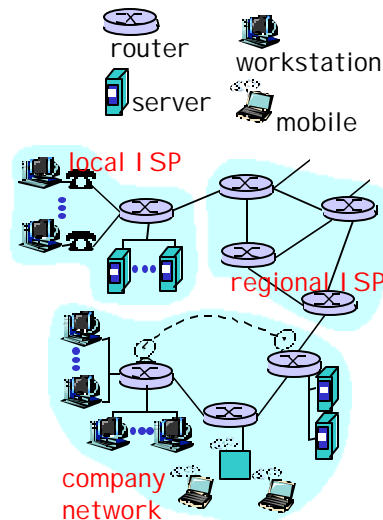

1: Introduction 2

What's the Internet: "nuts and bolts" view


- r **protocols**: control sending, receiving of msgs
 - m e.g., TCP, IP, HTTP, FTP, PPP
- r **Internet: "network of networks"**
 - m loosely hierarchical
 - m public Internet versus private intranet
- r **Internet standards**
 - m RFC: Request for comments
 - m IETF: Internet Engineering Task Force

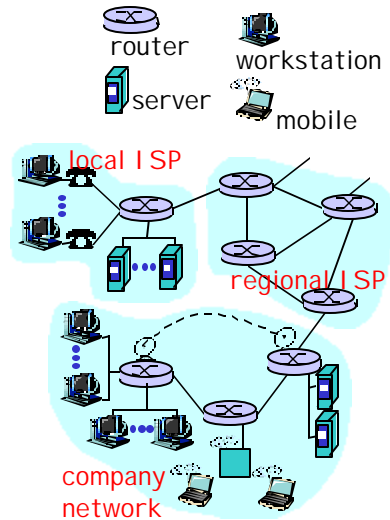

1: Introduction 3

What's the Internet: a service view

- r **communication infrastructure** enables distributed applications:
 - m WWW, email, games, e-commerce, database., voting,
 - m more?
- r **communication services provided**:
 - m connectionless
 - m connection-oriented
- r **cyberspace [Gibson]**:
 - "a consensual hallucination experienced daily by billions of operators, in every nation,"

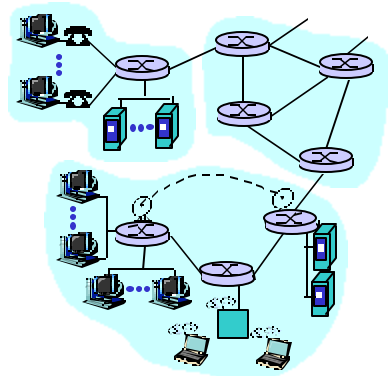

1: Introduction 4

What's a protocol?

human protocols:

- r "what's the time?"
- r "I have a question"
- r introductions
- ... specific msgs sent
- ... specific actions taken when msgs received, or other events


network protocols:

- r machines rather than humans
- r all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

What's a protocol?


a human protocol and a computer network protocol:

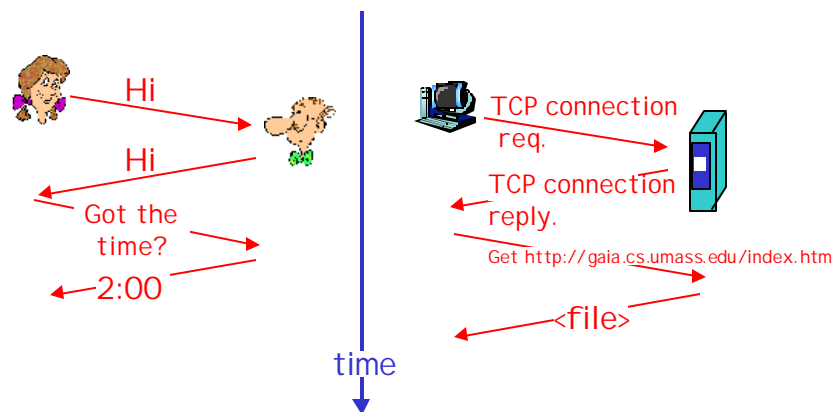

Q: Other human protocol?

A closer look at network structure:


- r **network edge:**
 - m applications and hosts
- r **network core:**
 - m routers
 - m network of networks
- r **access networks, physical media:**
 - m communication links

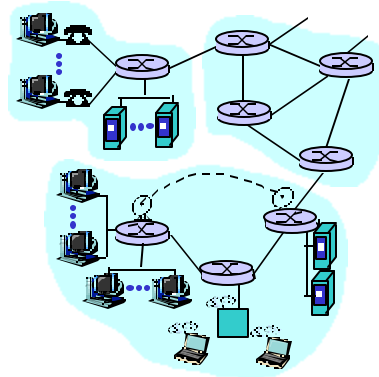

1: Introduction 7

The network edge:

- r **end systems (hosts):**
 - m run application programs
 - m e.g., WWW, email
 - m at "edge of network"
- r **client/server model**
 - m client host requests, receives service from server
 - m e.g., WWW client (browser)/server; email client/server
- r **peer-peer model:**
 - m host interaction symmetric
 - m e.g.: teleconferencing

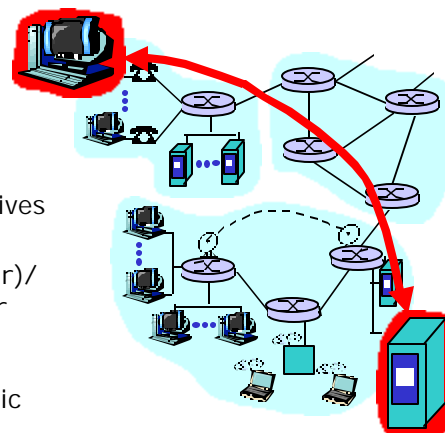

1: Introduction 8

Network edge: connection-oriented service

Goal: data transfer between end sys.

- r *handshaking*: setup (prepare for) data transfer ahead of time
 - m Hello, hello back human protocol
 - m *set up "state"* in two communicating hosts
- r TCP - Transmission Control Protocol
 - m Internet's connection-oriented service

TCP service [RFC 793]

- r *reliable, in-order* byte-stream data transfer
 - m loss: acknowledgements and retransmissions
- r *flow control*:
 - m sender won't overwhelm receiver
- r *congestion control*:
 - m senders "slow down sending rate" when network congested

1: Introduction 9

Network edge: connectionless service

Goal: data transfer between end systems

- m same as before!
- r **UDP** - User Datagram Protocol [RFC 768]: Internet's connectionless service
 - m unreliable data transfer
 - m no flow control
 - m no congestion control

App's using TCP:

- r HTTP (WWW), FTP (file transfer), Telnet (remote login), SMTP (email)


App's using UDP:

- r streaming media, teleconferencing, Internet telephony

1: Introduction 10

The Network Core


- r mesh of interconnected routers
- r **the fundamental question:** how is data transferred through net?
 - m **circuit switching:** dedicated circuit per call: telephone net
 - m **packet-switching:** data sent thru net in discrete "chunks"

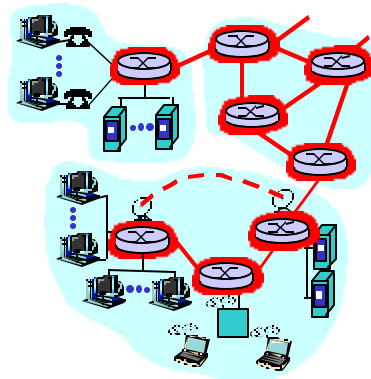

1: Introduction 11

Network Core: Circuit Switching

- End-end resources reserved for "call"**
 - r link bandwidth, switch capacity
 - r dedicated resources: no sharing
 - r circuit-like (guaranteed) performance
 - r call setup required

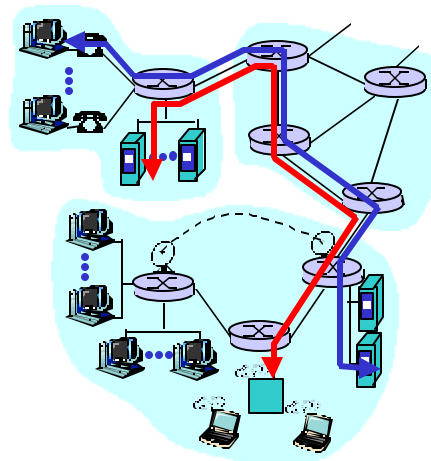

1: Introduction 12


Network Core: Circuit Switching (Multiplexing)

network resources

(e.g., bandwidth)

divided into "pieces"

- r pieces allocated to calls
- r resource piece *idle* if not used by owning call (*no sharing*)
- r dividing link bandwidth into "pieces"
 - m frequency division
 - m time division

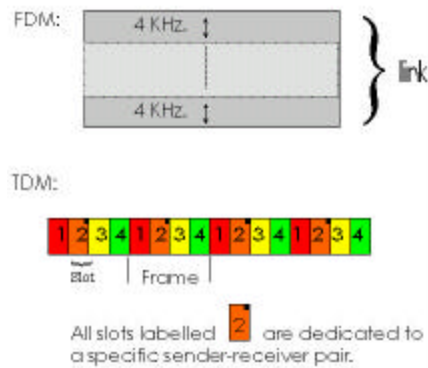

Network Core: Packet Switching


each end-end data stream
divided into *packets*

- r user A, B packets *share* network resources
- r each packet uses full link bandwidth
- r resources used *as needed*,


resource contention:

- r aggregate resource demand can exceed amount available
- r congestion: packets queue, wait for link use
- r store and forward: packets move one hop at a time
 - m transmit over link
 - m wait turn at next link

Bandwidth division into "pieces"
Dedicated allocation
Resource reservation




Network Core: Packet Switching

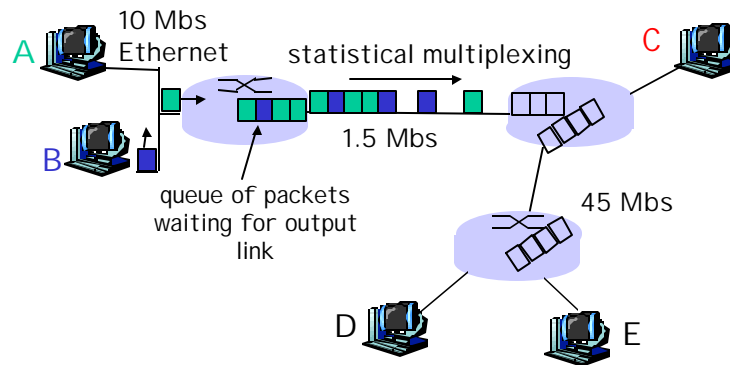

Packet-switching versus circuit switching: human restaurant analogy
 r other human analogies?

Network Core: Packet Switching

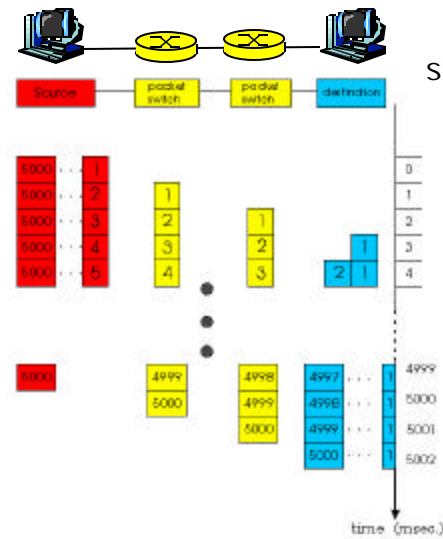


Packet-switching:
 store and forward behavior

Packet switching versus circuit switching

Packet switching allows more users to use network!

- r 1 Mbit link
- r each user:
 - m 100Kbps when "active"
 - m active 10% of time

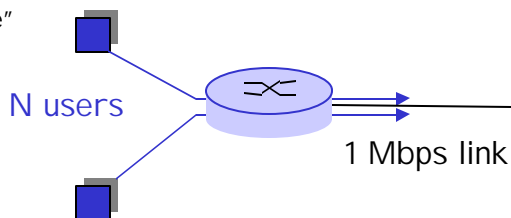

- r circuit-switching:
 - m 10 users
- r packet switching:
 - m with 35 users,
probability > 10 active
less than .004

1: Introduction 17

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"

- r Great for bursty data
 - m resource sharing
 - m no call setup
- r Excessive congestion: packet delay and loss
 - m protocols needed for reliable data transfer,
congestion control
- r Q: How to provide circuit-like behavior?
 - m bandwidth guarantees needed for audio/video
apps

still an unsolved problem (chapter 6)


1: Introduction 18

Packet-switched networks: routing

- r **Goal:** move packets among routers from source to destination
 - m we'll study several path selection algorithms (chapter 4)
- r **datagram network:**
 - m *destination address* determines next hop
 - m routes may change during session
 - m analogy: driving, asking directions
- r **virtual circuit network:**
 - m each packet carries tag (virtual circuit ID), tag determines next hop
 - m fixed path determined at *call setup time*, remains fixed thru call
 - m routers maintain per-call state

1: Introduction 19

Network Taxonomy

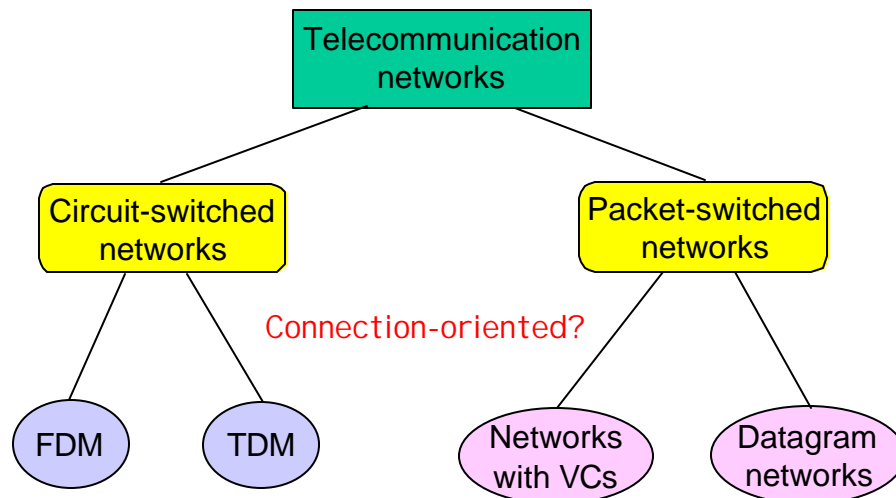

1: Introduction 20


Access networks and physical media

Q: How to connection end systems to edge router?

- r residential access nets
- r institutional access networks (school, company)
- r mobile access networks

Keep in mind:


- r bandwidth (bits per second) of access network?
- r shared or dedicated?

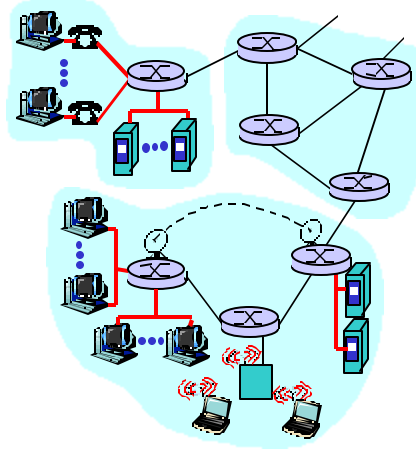

1: Introduction 21

Residential access: point to point access


- r **Dialup via modem**
 - m up to 56Kbps direct access to router (conceptually)
- r **ISDN:** intergrated services digital network: 128Kbps all-digital connect to router
- r **ADSL: asymmetric digital subscriber line**
 - m up to 1 Mbps home-to-router
 - m up to 8 Mbps router-to-home
 - m DSL/ADSL deployment: SBC, Covad



1: Introduction 22

Residential access: cable modems


- r **HFC: hybrid fiber coax**
 - m asymmetric: up to 10Mbps upstream, 1 Mbps downstream
- r **network** of cable and fiber attaches homes to ISP router
 - m shared access to router among home
 - m issues: congestion, dimensioning
- r **deployment:** available via cable companies, e.g., Road Runner, @Home, MediaOne

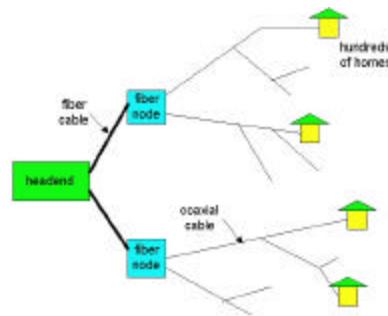

1: Introduction 23

Institutional access: local area networks


- r company/univ **local area network** (LAN) connects end system to edge router
- r **Ethernet:**
 - m shared or dedicated cable connects end system and router
 - m 10 Mbs, 100Mbps, Gigabit Ethernet
- r **deployment:** institutions, home LANs soon
- r LANs: chapter 5



1: Introduction 24

Wireless access networks

- r shared *wireless* access network connects end system to router
- r **wireless LANs:**
 - m radio spectrum replaces wire
 - m e.g., Lucent Wavelan 10 Mbps
- r **wider-area wireless access**
 - m CDPD: wireless access to ISP router via cellular network

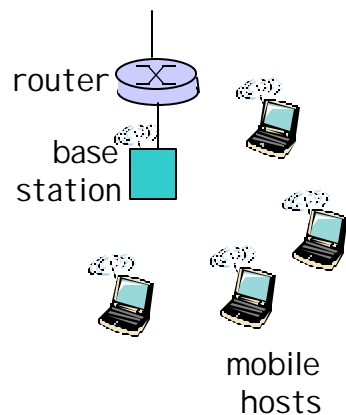

1: Introduction 25

Physical Media

- r **physical link:** transmitted data bit propagates across link
- r **guided media:**
 - m signals propagate in solid media: copper, fiber
- r **unguided media:**
 - m signals propagate freely e.g., radio

Twisted Pair (TP)

- r two insulated copper wires
 - m Category 3: traditional phone wires, 10 Mbps ethernet
 - m Category 5 TP: 100Mbps ethernet



1: Introduction 26

Physical Media: coax, fiber

Coaxial cable:

- r wire (signal carrier) within a wire (shield)
- m baseband: single channel on cable
 - m broadband: multiple channel on cable
- r bidirectional
- r common use in 10Mbps Ethernet



Fiber optic cable:

- r glass fiber carrying light pulses
- r high-speed operation:
 - m 100Mbps/1Gbps Ethernet
 - m high-speed point-to-point transmission (e.g., 5 Gps)
- r low error rate



1: Introduction 27

Qwest Fiber Networks



1: Introduction 28

Physical media: radio

- r signal carried in electromagnetic spectrum
- r no physical "wire"
- r bidirectional
- r propagation environment effects:
 - m reflection
 - m obstruction by objects
 - m interference

Radio link types:

- r **microwave**
 - m e.g. up to 45 Mbps channels
- r **LAN** (e.g., waveLAN)
 - m 2Mbps, 11Mbps
- r **wide-area** (e.g., cellular)
 - m e.g. CDPD, 10's Kbps
- r **satellite**
 - m up to 50Mbps channel (or multiple smaller channels)
 - m 270 Msec end-end delay
 - m geosynchronous versus LEOS


1: Introduction 29

Delay in packet-switched networks

packets experience **delay** on end-to-end path

- r **four** sources of delay at each hop

- r nodal processing:
 - m check bit errors
 - m determine output link
- r queueing
 - m time waiting at output link for transmission
 - m depends on congestion level of router

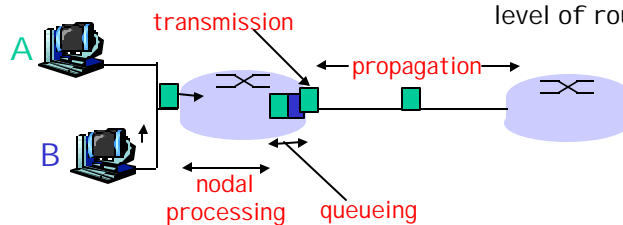

1: Introduction 30

Delay in packet-switched networks


Transmission delay:

- r R = link bandwidth (bps)
- r L = packet length (bits)
- r time to send bits into link = L/R

Propagation delay:

- r d = length of physical link
- r s = propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
- r propagation delay = d/s

Note: s and R are very different quantities!

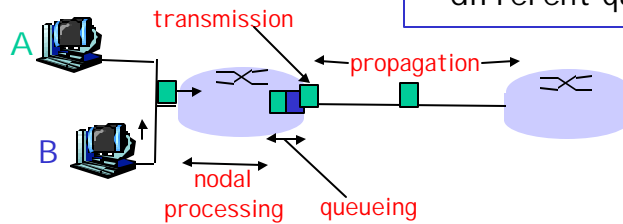


1: Introduction 31

Queueing delay (revisited)

- r R = link bandwidth (bps)
- r L = packet length (bits)
- r a = average packet arrival rate

traffic intensity = $\frac{La}{R}$

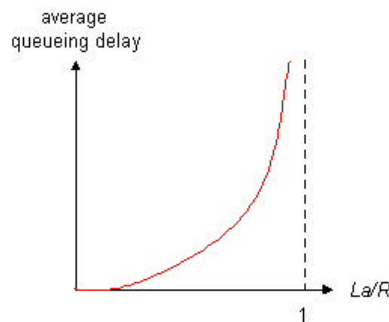

- r $La/R \sim 0$: average queueing delay small
- r $La/R \rightarrow 1$: delays become large
- r $La/R > 1$: more "work" arriving than can be serviced, average delay infinite!

1: Introduction 32